



## Magneto-resistive Sensors Series 300 • 10 - PNP

Housing M 18 x 1








- Housing material: Stainless steel VA
- Magneto-resistive sensors detect ferromagnetic targets, such as gear wheels, wipers, slitting discs, gear rods, etc.
- Contactless detection of rotary motion, therefore wear-free and maintenance-free operation.
- Measuring range from 0 Hz up to 25 kHz. Ideal for the safe detection of creeping movements as well as fast rotary motions.
- Measuring gear wheel modul size 0.7...4.00
- Width of target gear wheel  $\geq 10$  mm

Certificate:



<b>Technical data</b>	Flush mountable
Operating sensing distance $S_a$	< 4 mm (Modul 4), < 2 mm (Modul 1)
Electrical version	3-wire DC
Output	Normally open
<b>Type NPN</b>	
<b>Art.-No.</b>	
Connection diagram No.	
<b>Type PNP</b>	<b>MRS-300-M18-10-S</b>
<b>Art.-No.</b>	<b>360 500</b>
Connection diagram No.	4
Operating voltage ( $U_b$ )	10...35 V DC
Output current max. ( $I_o$ )	250 mA
Voltage drop max. ( $U_d$ )	$\leq 2.5$ V
Permitted residual ripple max.	10 %
No-load current ( $I_o$ )	Typ. 15 mA
Frequency of operating cycles min. / max.	0.5 Hz / 25 kHz
Permitted ambient temperature	-40...+85 °C / 125 °C*
LED-display	Yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67, IP 69K
Norm	EN 60947-5-2
Connection cable	2 m, silicone, 3 x 0.34 mm <sup>2</sup>
Housing material	VA No. 1.4404
Active surface	VA No. 1.4404
Lid	PEEK (FDA 21 CFR 177.2415)

All specifications are subject to change without notice. (03/2014)

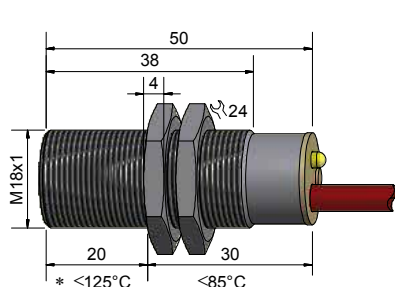

Made in Germany