



**Inductive High-Temperature Sensors
Series - 250**


- Housing M 18 x 1 with sealing screw
- For connection to the evaluation unit ISA-...-Y10-M18
 - Housing material: PEEK
 - For an ambient temperature of max. 250 °C

Certificate:



Technical data	Non-flush mountable
Operating distance S_n	8 mm
Sensing distance adjustable at the evaluation unit	-
Type	IS-250-M18
Art.-No.	IA 0118
Permitted ambient temperature	-70...+250 °C
Degree of protection IEC 60529	IP 68
Norm	EN 60947-5-2
Connection cable for connection to inductive evaluation units ISA-.... with plug-in connector	2 m PTFE with VA screen grid lead 2 x 0.22 AWG
Housing material	PEEK (FDA 21 CFR 177.2415)
Active surface	PEEK (FDA 21 CFR 177.2415)

All specifications are subject to change without notice. (11/2011)

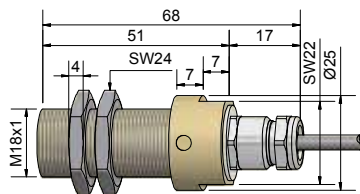

Made in Germany