



**Capacitive Sensors**  
**Series 70 - NPN**  
**Series 80 - PNP**

Housing M 32 x 1.5








- Housing material: PA / PPO
- Sensing distance 2...30 mm adjustable

Certificate:



Technical data	Non-flush mountable	Non-flush mountable
Operating distance $S_n$	20 mm	20 mm
Operating distance min. / max. adjustable	2...30 mm	2...30 mm
Electrical version	3-wire DC	4-wire DC
Output	Normally open (NO)	Antivalent
<b>Type NPN</b>	<b>KAS-70-35-S-M32-NL</b>	<b>KAS-70-35-A-M32-NL</b>
<b>Art.-No.</b>	<b>KA 0452</b>	<b>KA 0727</b>
Connection diagram No..	1	3
<b>Type PNP</b>	<b>KAS-80-35-S-M32-NL</b>	<b>KAS-80-35-A-M32-NL</b>
<b>Art.-No.</b>	<b>KA 0726</b>	<b>KA 0440</b>
Connection diagram No.	4	6
Operating voltage ( $U_B$ )	12...30 V DC	12...30 V DC
Output current max. ( $I_o$ )	200 mA	2 x 200 mA
Voltage drop max. ( $U_d$ )	$\leq 2.0$ V	$\leq 2.0$ V
Permitted residual ripple max.	5 %	5 %
No-load current ( $I_o$ )	< 15 mA	< 15 mA
Frequency of operating cycles max.	50 Hz	50 Hz
Permitted ambient temperature	-25...+70 °C	-25...+70 °C
LED-display	Yellow	Yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 67	IP 67
Norm	EN 60947-5-2	EN 60947-5-2
Connection	2 m, PVC, 3 x 0.75 mm <sup>2</sup>	2 m, PVC, 4 x 0.5 mm <sup>2</sup>
Housing material	PA / PPO	PA / PPO
Active surface	PA / PPO	PA / PPO
Lid	PA / PPO	PA / PPO

All specifications are subject to change without notice. (29.01.2010)

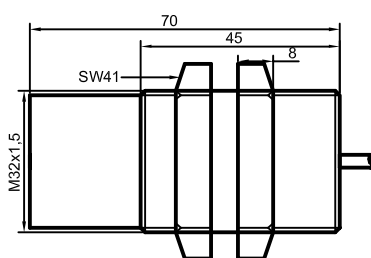

**Made in Germany**