



Capacitive Filling Level Probe - KFS

Series: **PER LEVEL**

2 Limit value switching points

- For connection to the capacitive amplifier KFA-5-3-...
- Housing material: GFK, 16 mm Ø
- Probe length max. 2000 mm

Certificate:



Technical data

Active Zones [mm]

10... 25, related to probe tip
+ 1 x type specific X2

Type

KFS-5-2-"L"-15/X2-Y76

Connection diagram

-

Permitted ambient temperature (for active zone)

-70...+250°C

Degree of protection IEC 529 (Probe)

IP 67

Connection cable to the evaluation unit
KFA-5-3-...

2m coax-cable with angled SMB-connector

Housing material

-

Active zone

GFK

Pressure


-

A mounting device for the probe is available as an accessory (KB PG 16)

Order details: See page 49

Other housing materials for the active zone (probe), like PE, PVDF, PTFE or PEEK on request.

Please determine the position of the second switching point "X2" when ordering.

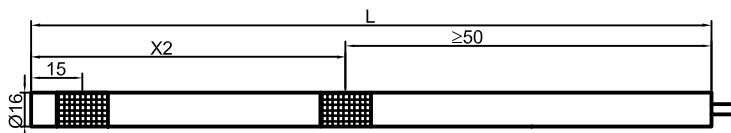

All specifications are subject to change without notice. (05/2004)