



Capacitive Filling Level Probe - KFS
 Series: **PER LEVEL**
3 Limit value switching points

- For connection to the capacitive amplifier KFA-5-...-Y70
- Housing material: PTFE, 16 mm Ø
- Probe length 1500 mm


Certificate:



Technical data

Active zones [mm]	10...25, related to the probe tip + 2 x type specific X2 / X3
Type	KFS-5-3-1500-15/X2/X3-Y75
Art.-No.	KF 0386
Permitted ambient temperature (for active zone)	-70...+250 °C
Degree of protection IEC 60529 (Probe)	IP 67
Norm	EN 60947-5-2
Connection cable to the evaluation unit KFA-5-...-Y70	5 m coax-cable with connectors SMB
Housing material	PTFE (FDA 21 CFR 177.1550)
Active zone	PTFE (FDA 21 CFR 177.1550)

Please determine the position of the second and third switching point "X2 / X3" when ordering.

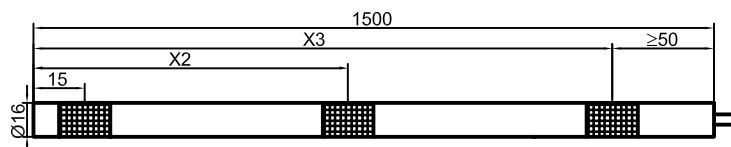

All specifications are subject to change without notice. (17.02.2011)

Made in Germany