



Capacitive Sensors Series 70 - NPN



Housing M 18 x 1








- Housing material: PA / PPO
- Sensing distance 1...10 mm adjustable

Certificate:



| Technical data | Non-flush mountable | Non-flush mountable |
|---|------------------------------------|------------------------------------|
| Operating distance S_n | 8 mm | 8 mm |
| Operating distance min. / max. adjustable | 1...10 mm | 1...10 mm |
| Electrical version | 3-wire DC | 4-wire DC |
| Output | Normally open (NO) | Antivalent (NO + NC) |
| Type NPN | KAS-70-A23-S-K-NL | KAS-70-A23-A-K-NL |
| Art.-No. | KA 0456 | KA 0807 |
| Connection diagram No. | 1 | 3 |
| Type PNP | | |
| Art.-No. | | |
| Connection diagram No. | | |
| Operating voltage (U_B) | 12...30 V DC | 12...30 V DC |
| Output current max. (I_o) | 200 mA | 2 x 200 mA |
| Voltage drop max. (U_d) | ≤ 2.0 V | ≤ 2.0 V |
| Permitted residual ripple max. | 5 % | 5 % |
| No-load current (I_o) | < 15 mA | < 15 mA |
| Frequency of operating cycles max. | 50 Hz | 50 Hz |
| Permitted ambient temperature | -25...+70 °C | -25...+70 °C |
| LED-display | Yellow | Yellow |
| Protective circuit | Built-in | Built-in |
| Degree of protection IEC 60529 | IP 67 | IP 67 |
| Norm | EN 60947-5-2 | EN 60947-5-2 |
| Connection cable | 5 m, PUR, 3 x 0.34 mm ² | 5 m, PVC, 4 x 0.34 mm ² |
| Housing material | PA / PPO | PA / PPO |
| Active surface | PA / PPO | PA / PPO |
| Lid | PA / PPO | PA / PPO |

All specifications are subject to change without notice. (31.03.2010)

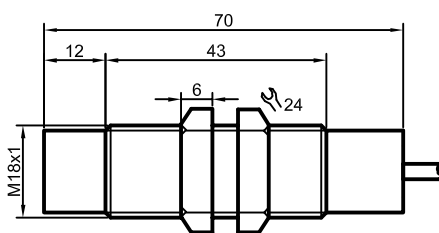

Made in Germany